



EH SERIES UNIVERSAL COOLERS

(万能型放熱器EH型)


EH (52) <H0420>




	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 50	3.7	129	309
(B) L: 70	2.8	180	424
(C) L: 100	2.3	257	598
(D) L: 120	2.0	308	714




EH (100) <H0421>




	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 70	1.8	337	765
(B) L: 100	1.5	481	1,078
(C) L: 120	1.3	577	1,286
(D) L: 150	1.2	722	1,599

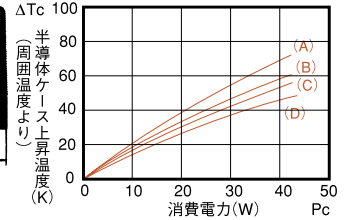


EH (160) <H0422>

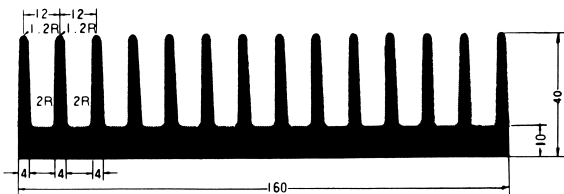


	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 70	1.3	531	1,189
(B) L: 100	1.1	759	1,674
(C) L: 120	0.96	911	1,998
(D) L: 150	0.86	1,139	2,483

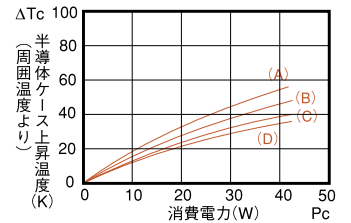


EH (220) <H0423>

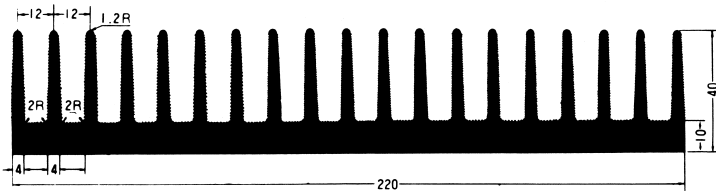


	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 70	1.1	727	1,614
(B) L: 100	0.92	1,038	2,273
(C) L: 120	0.80	1,246	2,712
(D) L: 150	0.71	1,557	3,371

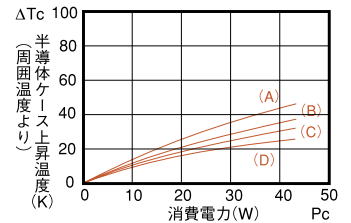


EH (256) <H0441>

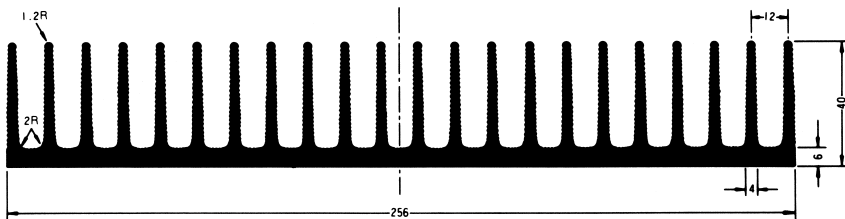


	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 100	0.79	1,000	2,234
(B) L: 120	0.70	1,205	2,666
(C) L: 150	0.63	1,506	3,314
(D) L: 200	0.53	2,008	4,394

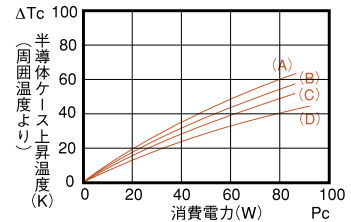

EH (304) <H0442>

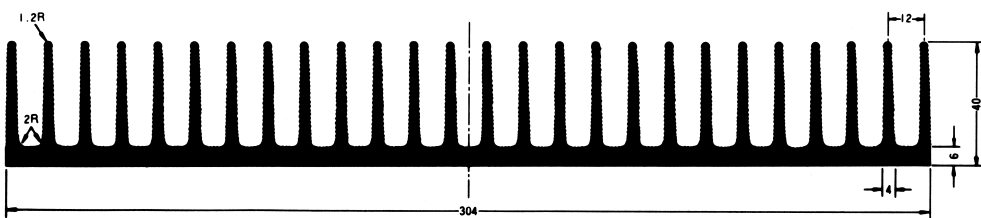


	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 100	0.67	1,189	2,641
(B) L: 120	0.61	1,428	3,152
(C) L: 150	0.57	1,784	3,918
(D) L: 200	0.49	2,379	5,194

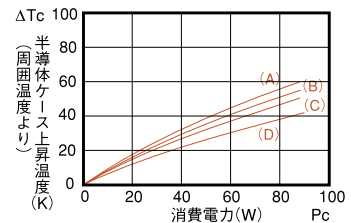


EK SERIES UNIVERSAL COOLERS (万能型放熱器EK型)


EK (56) <H0443>




	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 50	3.0	140	323
(B) L: 70	2.5	196	444
(C) L: 100	1.9	280	336
(D) L: 120	1.6	336	747




EK (95) <H0444>




	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 70	1.7	321	713
(B) L: 100	1.5	459	1,004
(C) L: 120	1.3	551	1,198
(D) L: 150	1.1	689	1,489

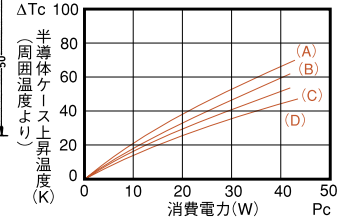


EK (147) <H0445>

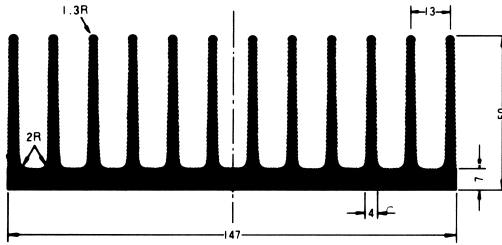


	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 70	1.1	488	1,071
(B) L: 100	0.95	697	1,508
(C) L: 120	0.85	837	1,799
(D) L: 150	0.74	1,046	2,236

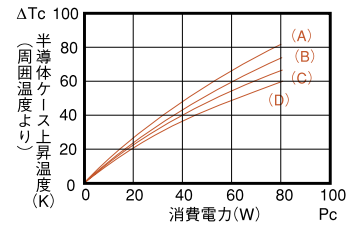


EK (199) <H0446>

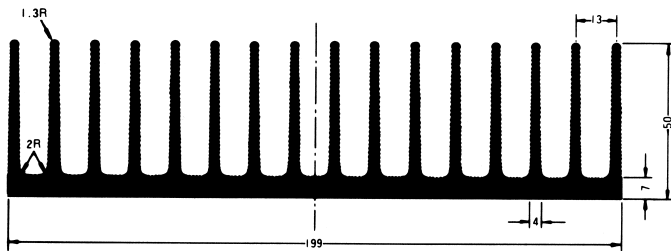


	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 70	0.86	655	1,429
(B) L: 100	0.77	935	2,011
(C) L: 120	0.70	1,122	2,400
(D) L: 150	0.60	1,403	2,982

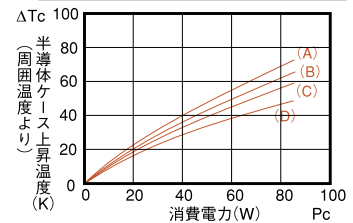


EK (251) <H0447>

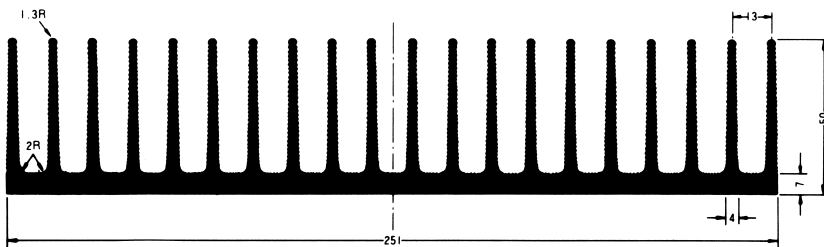

	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 100	0.67	1,173	2,515
(B) L: 120	0.62	1,408	3,000
(C) L: 150	0.56	1,760	3,729
(D) L: 200	0.50	2,347	4,943

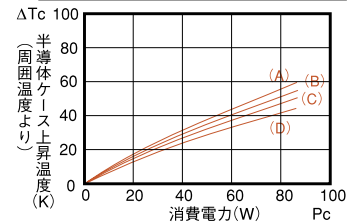

EK (290) <H0448>

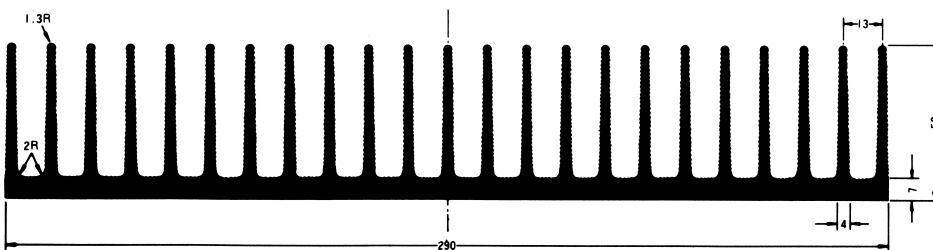

	熱抵抗 (K/W)	重量 (g)	表面積 (cm ²)
(A) L: 100	0.62	1,352	2,893
(B) L: 120	0.58	1,623	3,452
(C) L: 150	0.53	2,028	5,190
(D) L: 200	0.47	2,704	5,686

