


IC PACKAGE HEAT SINKS

(小型放熱器-DIシリーズ)

コンパクトな機器組立用に開発されたIC用放熱器は、直接放熱器と素子を接着させることにより、非常に小さなスペースで使用することができます。


DIX (18) - 6

L寸法
W寸法
基本形状

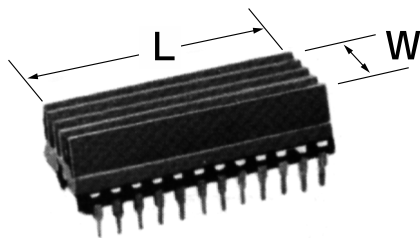


(呼称)


DIA (9) <H0901>




	L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A	36.0	31.1	14	1.9
B	50.0	27.6	20	2.6




DIA (25) <H0903>




	L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A	13.5	35.8	15	1.8
B	25.0	28.1	27	3.3
C	36.0	19.8	38	4.8
D	50.0	18.3	53	6.7

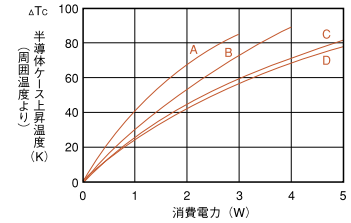


DIA (41) <H0905>




	L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A	13.5	27.9	24	3.0
B	41.0	14.7	70	9.0
C	82.0	9.43	139	19




DIB (13) <H0907>




	L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A	31.0	27.7	21	2.7
B	36.0	26.6	25	3.0
C	50.0	21.7	34	4.3
D	81.0	15.7	55	7.0




DIB (22) <H0908>




	L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A	22.0	25.8	25	3.0
B	44.0	17.7	49	6.1
C	50.0	16.4	56	7.0



DIB (31) <H0909>




	L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A	13.5	29.0	22	2.6
B	31.0	19.3	48	6.0
C	62.0	10.7	95	12



DIB (40) <H0910>




	L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A	13.5	22.8	28	3.4
B	40.0	13.0	79	10
C	80.0	7.63	157	20



DIB (49) <H0911>




	L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A	13.5	21.6	34	4.0
B	49.0	10.2	117	15
C	98.0	6.34	233	30




IC PACKAGE HEAT SINKS

(小型放熱器-DIシリーズ)

DIF (10) <H0912>




L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 31.0	30.5	22	2.8
B 36.0	26.9	25	3.3
C 50.0	22.8	35	4.6
D 81.0	17.8	57	7.4



DIF (13) <H0913>




L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 26.0	23.5	23	3.0
B 36.0	22.0	32	4.0
C 50.0	18.4	44	5.6



DIF (22) <H0914>




L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 13.5	29.2	20	2.4
B 22.0	23.9	32	4.0
C 44.0	16.8	63	8.0
D 50.0	16.1	72	9.6

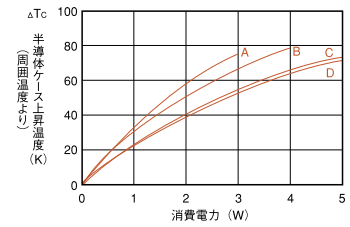

DIF (31) <H0915>




L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 13.5	23.7	28	3.5
B 31.0	15.8	62	8.0
C 62.0	10.4	123	16




DIF (49) <H0917>




L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 13.5	18.2	44	4.8
B 49.0	8.79	151	18
C 98.0	5.71	300	35




DIG (8) <H0918>




L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 31.0	25.4	23	2.9
B 36.0	22.3	26	3.3
C 50.0	19.1	36	4.6
D 81.0	14.1	59	7.5

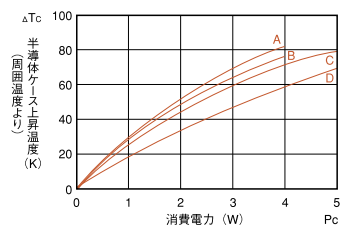

DIG (18) <H0919>




L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 36.0	18.0	54	6.7
B 50.0	15.0	74	9.3




DIG (29) <H0920>



L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 13.5	20.9	32	4.0
B 29.0	15.6	66	8.7
C 58.0	9.79	130	18



DIG (39) <H0921>



L寸法 (mm)	熱抵抗 (K/W)	表面積 (cm ²)	重量 (g)
A 39.0	10.7	118	16
B 78.0	7.15	234	32

