



## EF SERIES UNIVERSAL COOLERS

(万能型放熱器EF型) (旧KWF型)



### EF (50) <H0410>

	熱抵抗 (KW)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 50	5.5	75	211
(B) L: 70	4.4	104	291
(C) L: 100	3.4	149	411
(D) L: 120	3.0	179	491




### EF (74) <H0411>

	熱抵抗 (KW)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 50	4.5	109	306
(B) L: 70	3.2	152	421
(C) L: 100	2.6	217	595
(D) L: 120	2.2	260	711

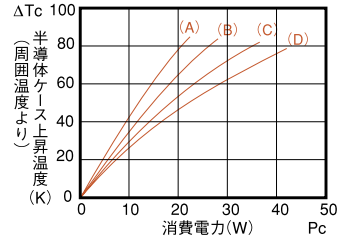



### EF (98) <H0412>

	熱抵抗 (KW)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 70	2.1	200	552
(B) L: 100	1.9	286	779
(C) L: 120	1.8	343	931
(D) L: 150	1.6	429	1,158

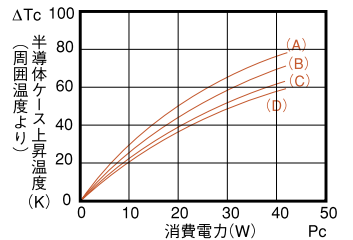


### EF (154) <H0414>

	熱抵抗 (KW)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 70	1.8	312	856
(B) L: 100	1.5	446	1,209
(C) L: 120	1.3	535	1,444
(D) L: 150	1.2	669	1,797

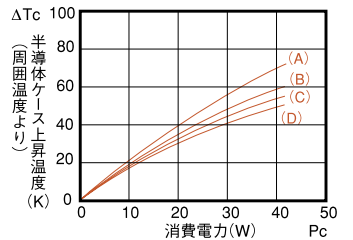



### EF (210) <H0415>

	熱抵抗 (KW)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 70	1.6	410	1,327
(B) L: 100	1.3	607	1,877
(C) L: 120	1.2	703	2,244
(D) L: 150	1.0	879	2,794

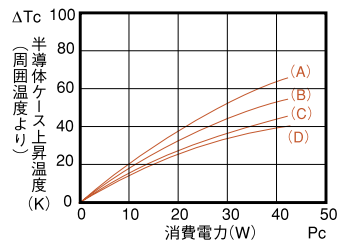



### EF (250) <H0437>

	熱抵抗 (KW)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 100	1.1	733	1,533
(B) L: 120	0.97	880	1,829
(C) L: 150	0.87	1,099	2,273
(D) L: 200	0.74	1,466	3,012

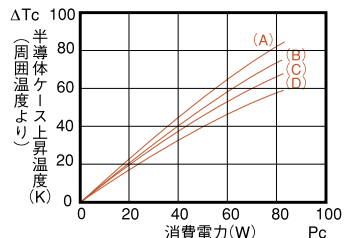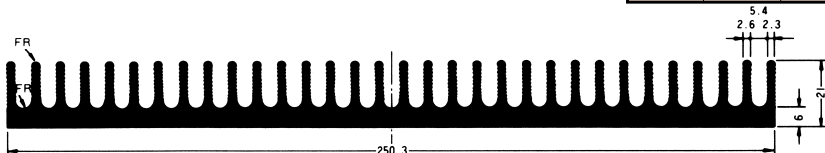

### EF (298) <H0438>


	熱抵抗 (KW)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 100	0.80	872	1,822
(B) L: 120	0.76	1,046	2,173
(C) L: 150	0.68	1,308	2,700
(D) L: 200	0.55	1,744	3,579

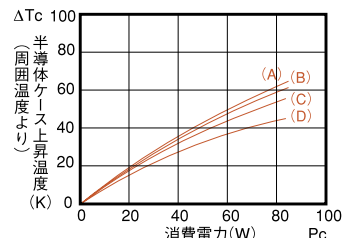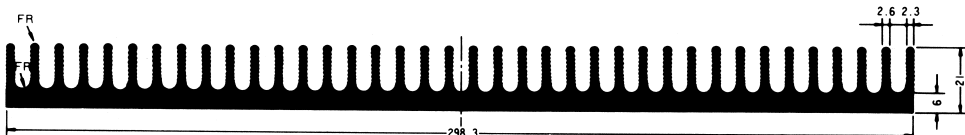


# EG SERIES UNIVERSAL COOLERS

(万能型放熱器EG型) (旧KWN型)


## EG (98) <H0417>




	熱抵抗 (K/W)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 50	2.3	129	628
(B) L: 70	2.0	181	872
(C) L: 100	1.6	258	1,237
(D) L: 120	1.4	310	1,481

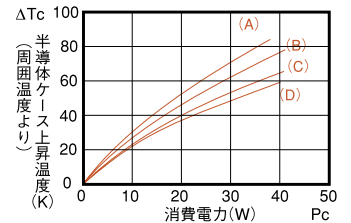


## EG (138) <H0418>




	熱抵抗 (K/W)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 70	1.5	252	1,209
(B) L: 100	1.4	360	1,716
(C) L: 120	1.2	432	2,053
(D) L: 150	1.1	540	2,560

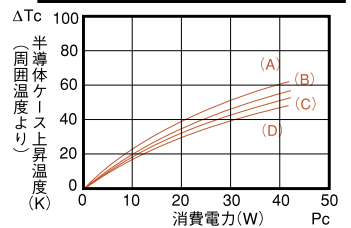


## EG (202) <H0419>




	熱抵抗 (K/W)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 70	1.2	367	1,747
(B) L: 100	1.1	524	2,480
(C) L: 120	1.0	629	2,968
(D) L: 150	0.82	786	3,700

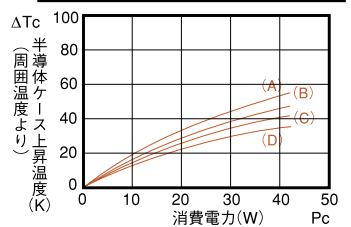

## EG (250) <H0439>

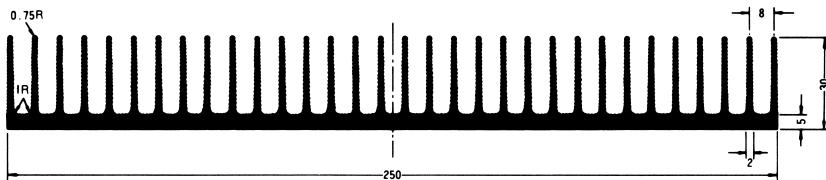

	熱抵抗 (K/W)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 100	0.85	651	2,360
(B) L: 120	0.80	781	2,823
(C) L: 150	0.74	976	3,516
(D) L: 200	0.68	1,301	4,672

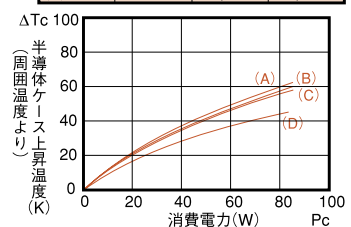

## EG (298) <H0440>



	熱抵抗 (K/W)	重量 (g)	表面積 (cm <sup>2</sup> )
(A) L: 100	0.70	774	2,803
(B) L: 120	0.67	929	3,352
(C) L: 150	0.60	1,161	4,177
(D) L: 200	0.53	1,548	5,550

